


JM series

Features

- ◆ Easy installation and simple operation
- ◆ Accurate measurement and adjustable flow at will
- ◆ Strong anti-corrosiveness
- ◆ Economical & practical
- ◆ Metal strengthened diaphragm, long-life


Application

- ◆ counter osmosis, electro dialysis
- ◆ Water circulation cooling
- ◆ Purification of water & sewage treatment
- ◆ Laboratory & testing room
- ◆ Other small-size measuring equipments

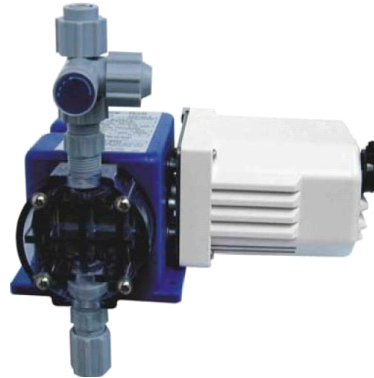

Model	Stroke (min-1)	Rated flow (LPH)		Max. Pressure		Connect ion size	Power (w)	Weight (KG)
		50Hz	60Hz	Bar	psig			
JM-0.47/7	7	0.47	0.56	7	101.5	M19x1.5	15W	4.1
JM-1.10/7	13	1.1	1.32	7	101.5			
JM-2.36/7	25	2.36	2.83	7	101.5			
JM-3.78/7	51	3.78	4.54	7	101.5			
JM-4.72/7	51	4.72	5.66	7	101.5			
JM-10.72/4.2	70	10.72	12.86	4.2	60.9			
JM-15.77/4.2	70	15.77	18.92	4.2	60.9			

Kits

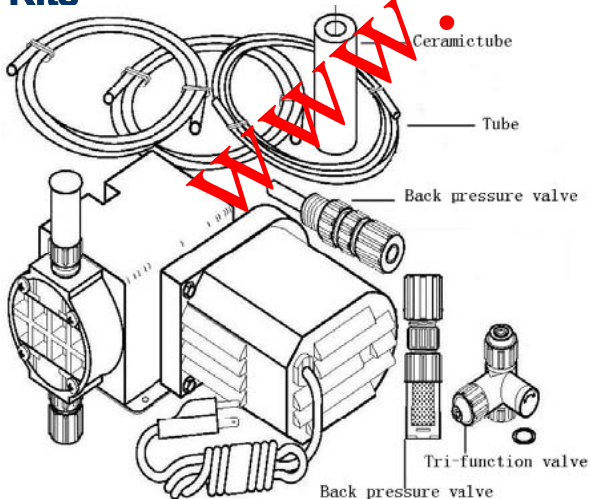

Material

Part	Standard material	Optional material
Pump head	PVC	SS304, SS316
Connection part	PVC	SS304, SS316
Valve seat	Viton	Teflon
Diaphragm	Viton	Teflon
Gasket	Teflon	
Valve Ball	Ceramic	
Discharge Tube	PE	
Suction tube	PVC	

JM SYSTEM